



YLI ELECTRONIC

European Standard Waterproof Key Switch For Rolling Door


Model: YKS-853A/B(EN)



Specification

- Size: 76Lx91Wx46H(mm) (YKS-853A(EN))
78Lx91.5Wx61H(mm) (YKS-853B(EN))
- Structure: All alloy construction, brass key
- Contact Rating: 5A/125VAC (max)
- Contact Output: Double pole: NO/NC/COM
- IP Rating : IP65 Waterproof
- Mechanical life: 500,000 tests
- Feature: Surface mount/ Mortise mount
- Type: Self-reset
- Faceplate Treatment: Zinc alloy with black paint treatment
- Operating Temperature: -20°C ~ +55°C(14-131F)
- Operating humidity: 0-95% (non- condensing)
- Weight:0.4kg



Installation & Dimensions

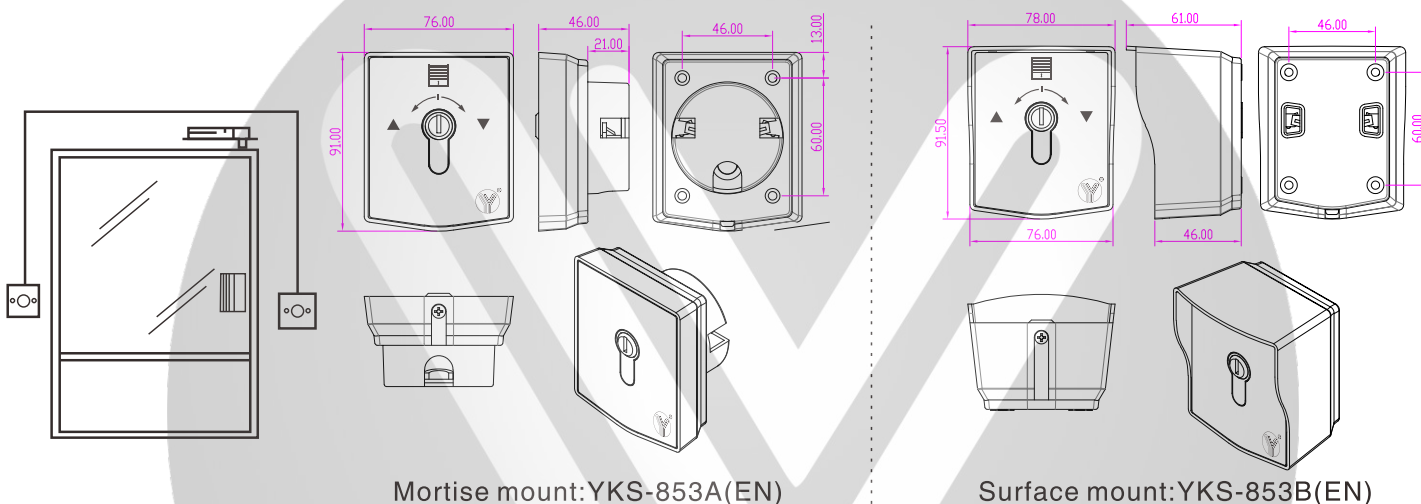

Assembly steps&Removing steps

1. Insert the key to rotate the lock cylinder 20 degrees and hold, fix the panel slot on the bottom buckle
2. Fix the the panel and back box together

1. Remove the anti-theft screw with a wrench
2. Insert the key to rotate the lock cylinder 20 degrees and hold, then remove the panel of the switch from the bottom

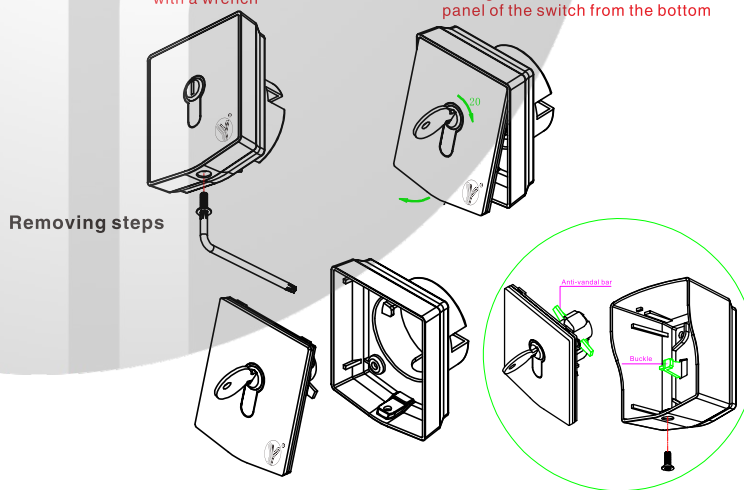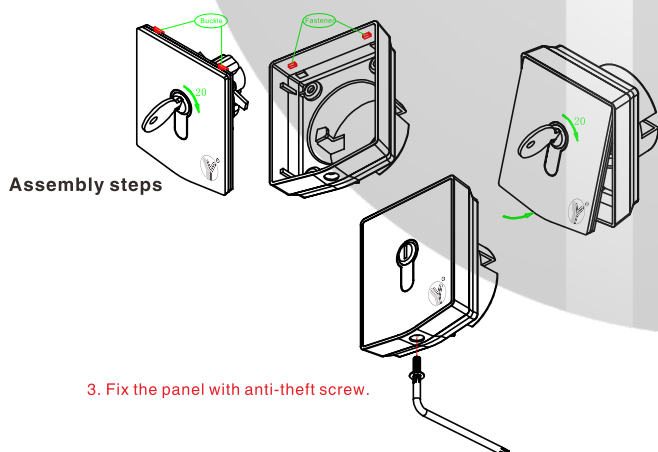

Connecting Diagram

